


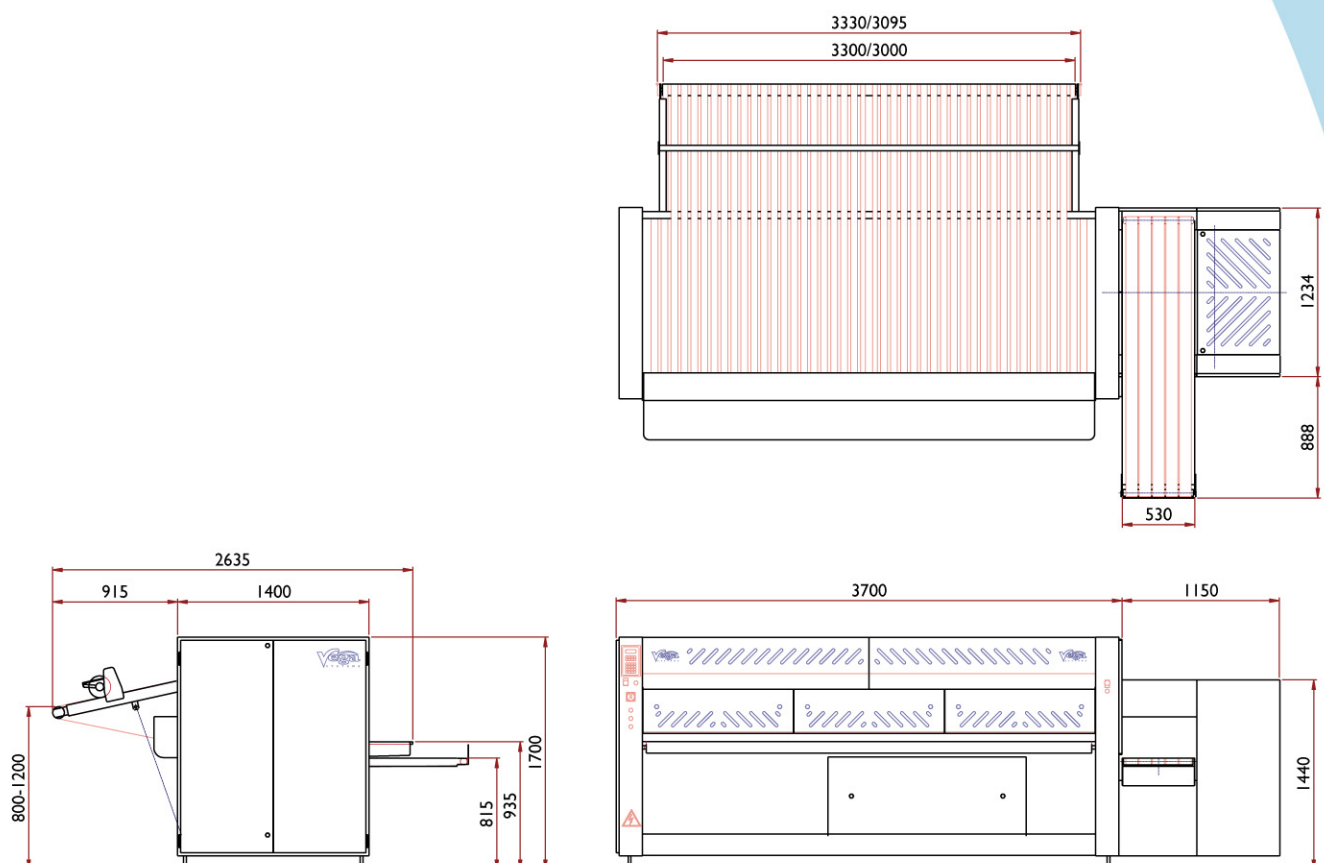

STANDARD LATERAL FOLDS SECTION:

Working width : up to 3.300 mm
 Number of lanes : 1, 2, 3 or 4
 Number of lateral folds : 1 or 2.
 Maximum length single-lane : 3.300 mm
 Maximum length multi-lane : 1.200 mm

STANDARD CROSSFOLDS SECTION:

Number of lanes : 1
 Number of cross folds : 1, 2 or 3
 Maximum width : 875 mm

TECHNICAL SPECIFICATIONS:

Electrical source : 3 x 400V + 0 + E, 50 Hz.
 Electrical consumption : 2,5 kW, 16 Amp.
 Pneumatic connection : 1/2 ", 6 bar.
 Pneumatic consumption : 15 litre/piece single lane.

OPTIONAL:

Automatic speed synchronisation from 8 to 50 m/min.
 Access bridge and stairs.
 Antistatic bar system.
 Maximum length multi-lane up to 3.000 mm.
 Reject system.
 Mechanical by-pass on lateral fold section.
 Third lateral fold.
 Two-lane crossfold
 Working width up to 4.000 mm.

INSTALLATION AND SERVICE:

Please contact VEGA-systems for more detailed lay-outs and technical data required for installation and service.



VEGA-systems B.V.
 Dommelstraat 37
 5347 JK Oss, The Netherlands
 Phone +31(0)412 407090
 Fax +31(0)412 407091
 info@vegasytems.nl
 www.vegasytems.nl